


SHE SERIES

25-30




- AUTOMATIC TAPPING FEED
- FIXED TABLE, SLIDING AND ROTATING HEADSTOCK
- CAST IRON HEAD, BASE, AND COLUMN



[+]

- Hardened and ground steel gears
- Table/base with "T" slots
- Adjustable depth end
- Lighting equipment
- Tool ejector
- Motor guard
- Emergency push button
- Manual/automatic cycle selector
- Single/continuous cycle selector
- Adjustable stops and microswitches: depth, reversal, and stop
- Variator brake device
- Main switch
- Electrical equipment at low voltage
- Electrical equipment in a separate cabinet
- Drill guard with stop micro
- Gears greased by automatic pump
- CE norms

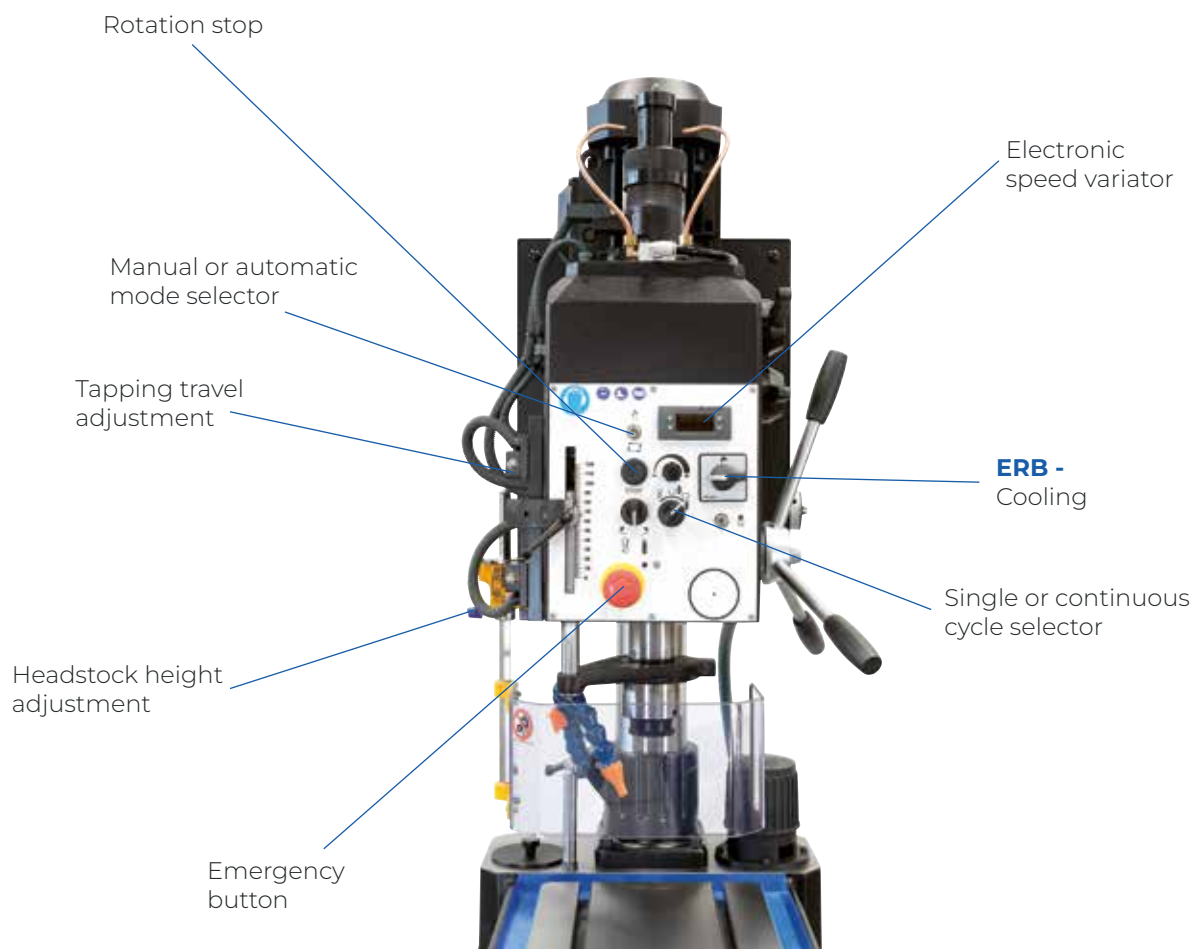

FEATURES		SHE.25	SHE.30
Maximum drilling capacity in steel 50/60	Ø mm	25	30
Maximum tapping capacity in steel 50/60		M22	M25
Morse cone	Num.	3	
Maximum spindle stroke (drilling depth)	mm	90	
Main motor power	KW	1.5	2.2
Transmission		Gears	
Number and range of speeds (without variator)	rpm	(8) 65-125-185-365-540-1055-1560-3060	
Feed		Manual	
Worktable dimensions (LxW)	mm	270 x 270	
Column diameter	mm	100	
Distance from the spindle centre to the face of the column	mm	250	
Net weight <i>Without and with intermediate table</i>	kg	200	
Gross weight with packaging <i>Without and with intermediate table</i>	kg	260	
Packaging dimensions (length x width x height)	mm	890x640x1350	

OPTIONAL FITTINGS

CODE

10020	V - Frontal wheel for fine sensitive feed
10022	LBC - Digital depth reader
10075	HGP-S - Additional standard spindle, special pitch
10080	HGP - Additional standard spindle, standard pitch
10082	PKB - Base cabinet with door and drawers
10083	PKA - Base cabinet with 2 shelves (only for bench drilling machines without cooling)
10084	PKC - Base cabinet (only for models with intermediate table)
10087	MIF - Fixed intermediate table
10088	MIG - Rotating intermediate table
10085	CC - Cycle counter
10110	SC - Column supplement 200 mm
91118	ERB - Cooling equipment in base

** For machines with intermediate table, the base has no drawer. (ref. PKC)*

ACCESSORIES



TOOL HOLDER



VICES



PEDAL



MULTIPLE HEADS



BIMANUAL COMMAND

