



6 Onderdelentekeningen.


Onderdeeltekening 1

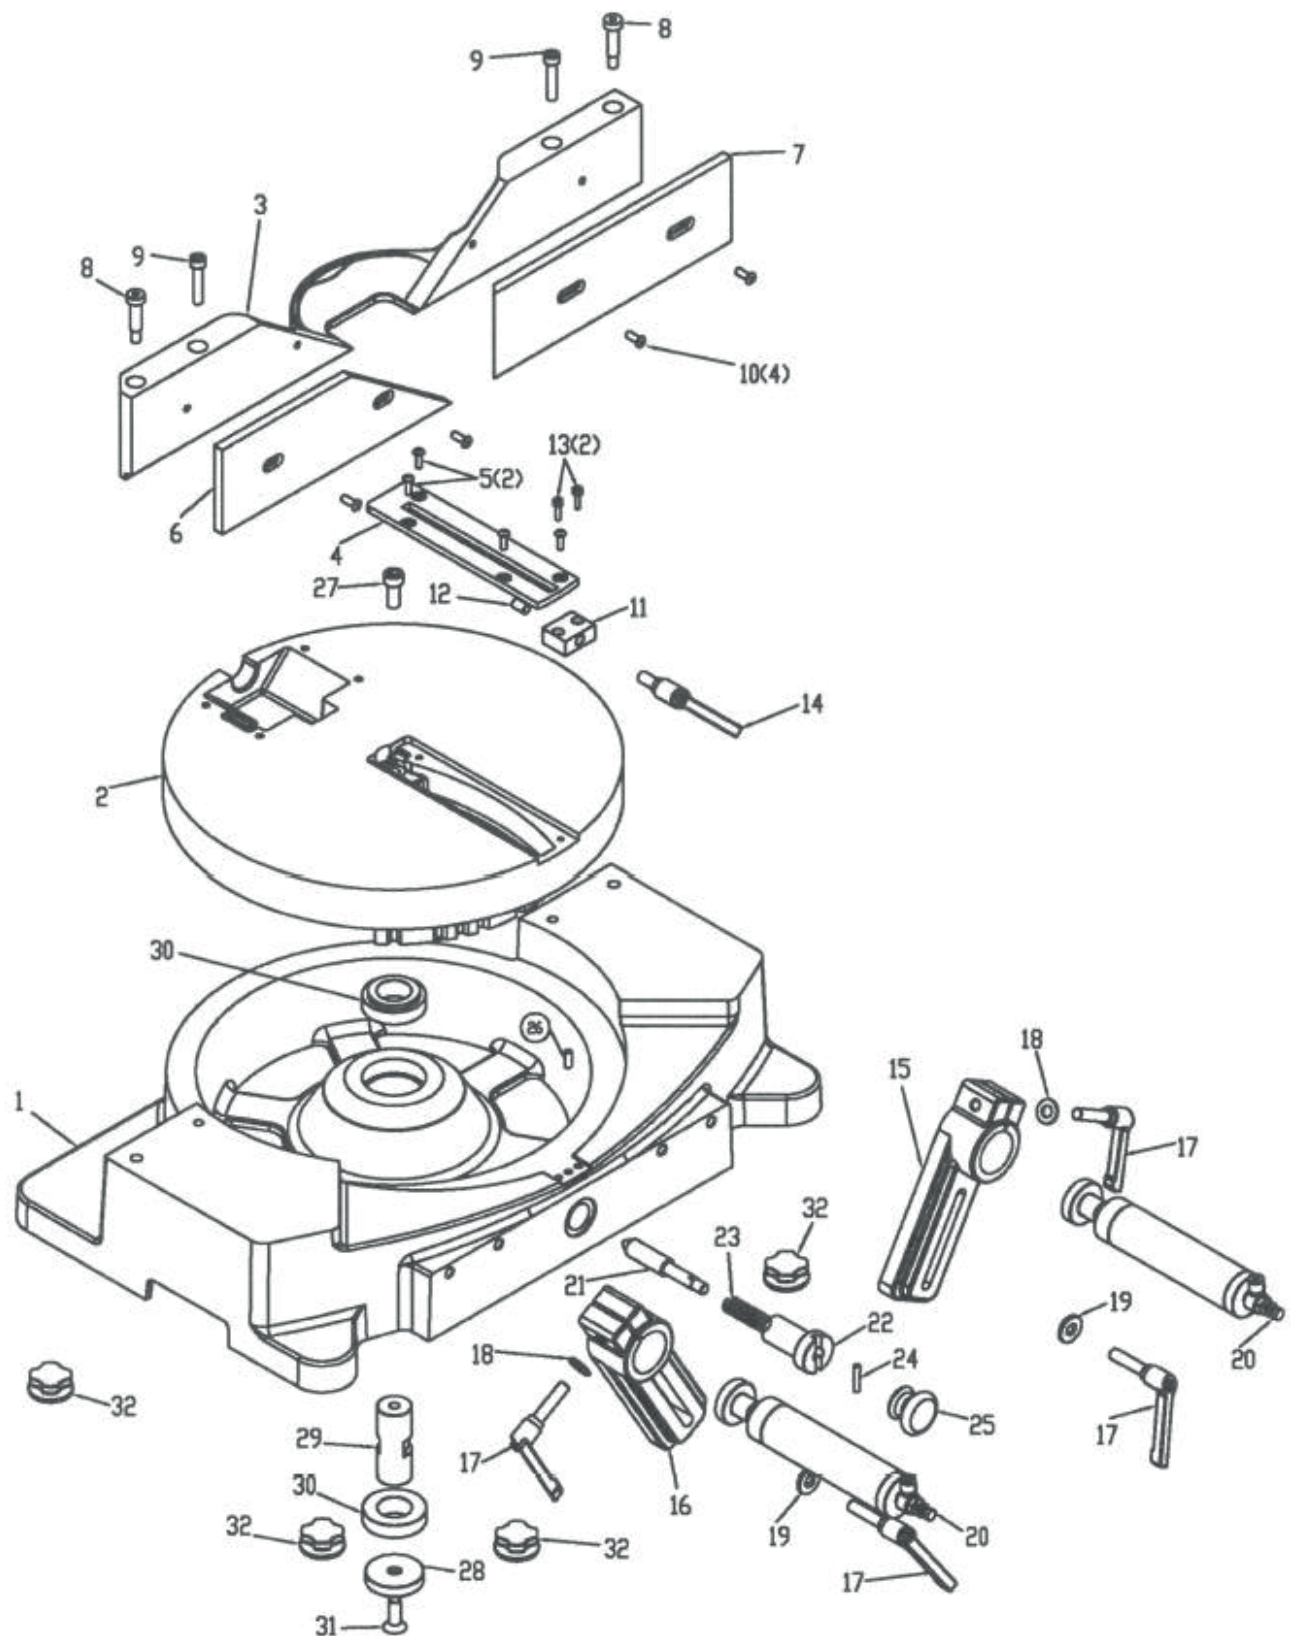

Onderdeeltekening 2:

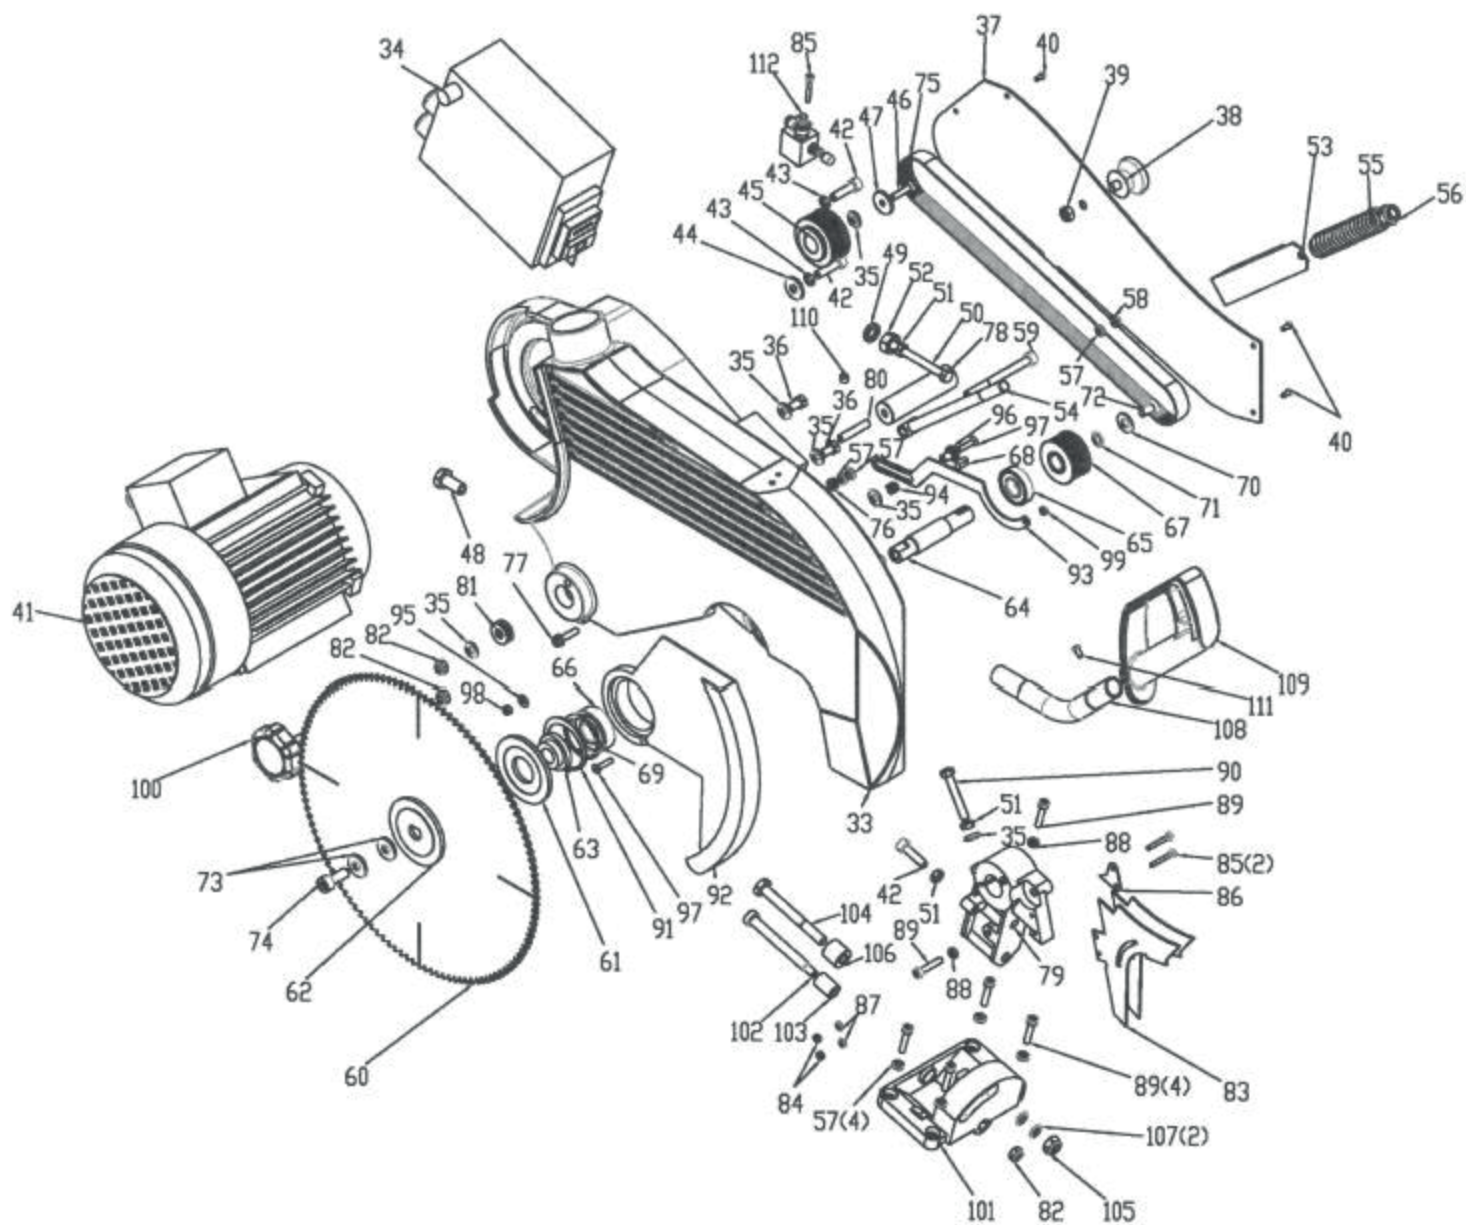

Onderdeeltekening onderkast:

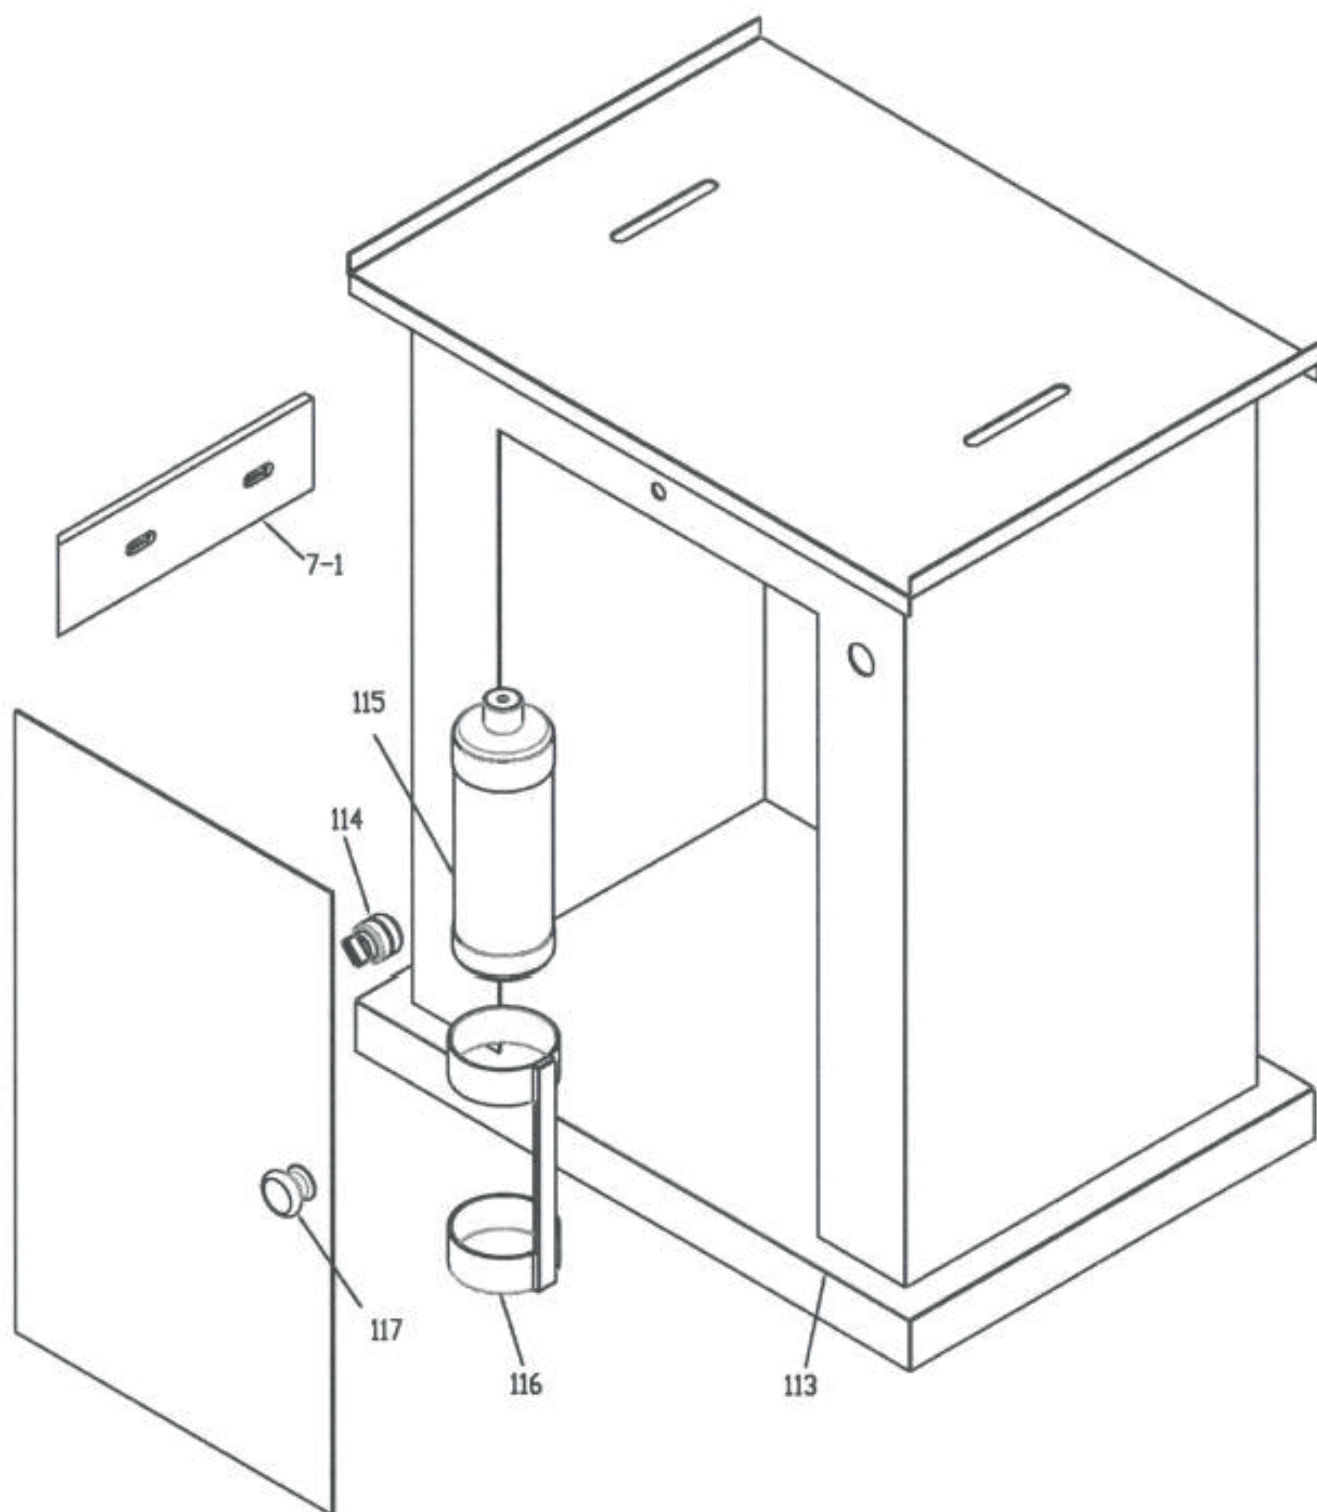


7. Onderdelen lijst:

Zaag Onderdelen Lijst			
Onderdeel nr.	Beschrijving	Afmeting	Aantal
1	Base		1
2	Round Plate		1
3	Backgage Seat		1
4	Blade Plate		1
5	Screw	M5x16	4
6	Backgage Seat Left Plate		1
7	Backgage Seat Right Plate	45 degree	1
7-1	Backgage Seat Right Plate	90 degree	1
8	Screw	M8x13	2
9	Screw	M8x40	2
10	Screw	M6x16	4
11	Round Plate Seat		1
12	Round Plate Seat Soft Column		1
13	Screw	M5x16	2
14	Flexible Pin	M10x20	1
15	Pneumatic Clamping Rod Right Seat		1
16	Pneumatic Clamping Rod Left Seat		1
17	Flexible Pin	M10x40	4
18	Washer	M10x22x10	2
19	Washer	M10x25x10	2
20	Pneumatic Clamping		2
21	Round Plate Pin		1
22	Round Plate Pin Seat		1
23	Spring	15x5x43	1
24	Pin Spring	5x26	1
25	Round Plate Pin Handle		1
26	Screw	M6x16	1
27	Screw	M10x25x10	1
28	Base Bearing Plate		1
29	Swivel Shaft		1
30	Bearing	32006	2
31	Screw	M10x24	1
32	Rubber Plate		4
33	Bow Saw		1
34	Power Box		1

35	Washer	M8	6
36	Screw	M8	2
37	Bow Saw Power		1
38	Bow Saw Power Handle		1
39	Screw		1
40	Screw	M4x10	5
41	Motor		1
42	Screw		3
43	Spring Washer	M8	2
44	Washer	M8	1
45	Motor Belt		1
46	Screw	M6x26	1
47	Washer	M6	1
48	Screw	M12x8	1
49	Spring Washer	M12x8	1
50	Screw	M8x80	1
51	Nut	M8	3
52	Nut	M12	1
53	Flexible Seat		1
54	Flexible Seat Handle		1
55	Flexible Seat Handle Spring		1
56	Nut	M12	1
57	Washer	M6	7
58	Nut	M6	1
59	Screw	M8x30x90	1
60	Blade		1
61	Blade Within Clip		1
62	Blade Outer Clip		1
63	Blade Seat		1
64	Blade Shaft		1
65	Bearing	6203	1
66	Bearing	6204	1
67	Blade Belt		1
68	Key	6x6x15	1
69	C-ring	20	1
70	Blade Belt Washer	M8xT1	1
71	Blade Belt Washer	M8xT2	1
72	Screw	M8x15	1
73	Washer	M10	2
74	Screw	M10x25	1
75	Belt		1
76	Nut	M6	1
77	Screw	M6	1
78	Swivel Shaft		1
79	Swivel Up Seat		1

80	Screw	M8x40	1
81	Bearing	51100	1
82	Nut	M8	3
83	Blade Down Cover		1
84	Nut	M4	2
85	Screw	M4x30	3
86	Swivel Up Seat		1
87	Washer	M4	2
88	Nut	M6	2
89	Screw	M6x130	6
90	Screw	M8x50	1
91	C-ring	55	1
92	Blade Outer Cover		1
93	Blade Outer Cover Support		1
94	Blade Outer Cover Support Ring		1
95	Washer		1
96	Blade Spring Bushing		1
97	Screw	M5x120	2
98	Nut	M5	1
99	Set Slide Nut	M5	1
100	Swivel Seat Handle		1
101	Swivel Down Seat		1
102	Swivel Down Screws		1
103	Swivel Down Bushing		1
104	Screw	M10x30x90	1
105	Set Slide Nut	M10	1
106	Swivel Down Up Bushing		1
107	Washer	10x16x10	2
108	Wire Handle Pipe		1
109	Wire Handle		1
110	Screw	M8x6	1
111	Screw		1
112	Oil Mist Device		1
113	Machine Stand		1
114	Power Knob		1
115	Oil Mist Bottle		1
116	Oil Mist Bottle Holder		1
117	Machine Stand Door		1

8. Elektrisch Schema en onderdelen:

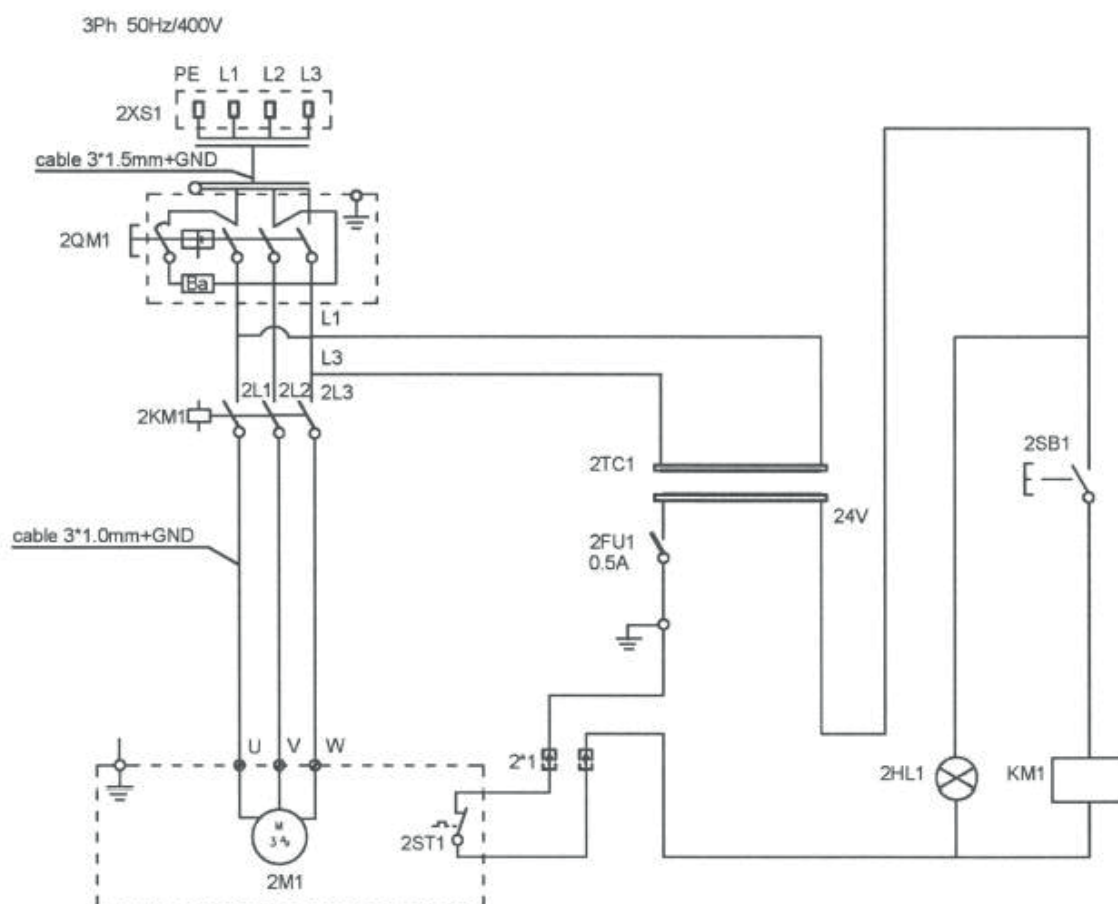

Onderdelen Elektrisch Schema			
Onderdeel	Beschrijving	Onderdeel Nr.	Specificaties
2KM1	MAGNETIC SWITCH FOR MOTOR	S-P09-S/AC24V (Shihlin)	AC 600V AZ1=1TH=20A CE
2QM1	MAIN POWER SWITCH	KJD-18 400V (Kedu)	AC3-7,5A AC-15-6A AC-1-13,5A CE
2SB1	TRIGGER SWITCH	CMV100D	UI:380V ITH:10A AC-15 DC-13 CE
2M1	MOTOR		3Ph 400V 50HZ
2HL1	PILOT LIGHT		24V DC
2FU1	FUSE		0,5 Amp
2ST1	TEMPERATURE OVER LOAD (INTERNAL MOTOR)		
2TC1	TRANSFORMER		400V/24V/10AV